




WILLIAM JOHNSTON & COMPANY LIMITED

Glasgow Tel: +44 (0) 141 620 1666 | Inverness Tel: +44 (0) 1463 238 673
sales@williamjohnston.co.uk | www.williamjohnston.co.uk



Data / Specification Sheet • Novus FI (Foil)

Novus FI is a graphite laminate material with one or more thin, flat stainless steel 316 insertions. The thickness of the reinforcement is 0.05mm. The graphite sheet is fixed to the insertion by means of a super thin chloride-free adhesive layer. This reinforcement results in a sturdy gasket which is relatively easy to handle and simple to process into gaskets.

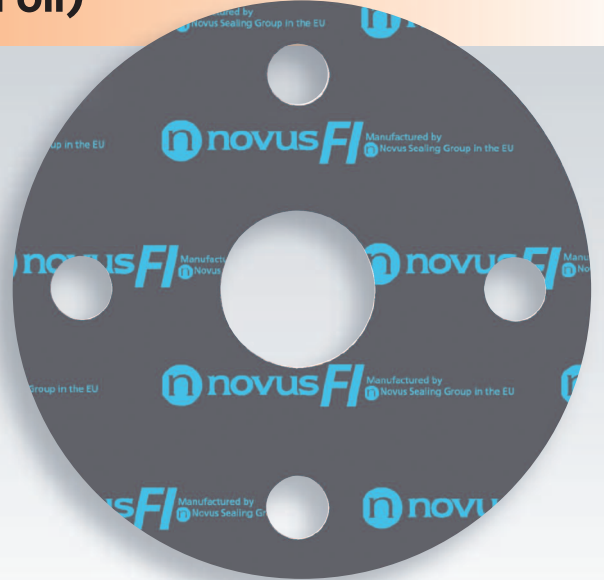

Service

Novus FI is used in a wide range of applications in the chemical and petrochemical and manufacturing industries, including pumps, compressors and pipe joints. It is commonly used as a back up sheet for Novus TI due to the ease of manual cutting.

Approvals / Compliance

BAM for Oxygen approved

Availability

Thickness range:
1.0mm to 3.0mm


Standard sheet size:
1.0m x 1.0m

Other thicknesses available
on request.

Physical properties

Thickness	1.5mm
No. of Inserts	1
Density	1.0g/cm ³
Ash Content	Max 2%
Chloride Content	Max 50ppm
Compressibility	ASTM F36A 40-50%
Recovery	ASTM F36A 10-15%
Residual Stress	DIN 52913 (300°C) Min 45 MPa
ASME m Factor	2
y Value	1500psi

Novus FI Pressure/Temperature Limits

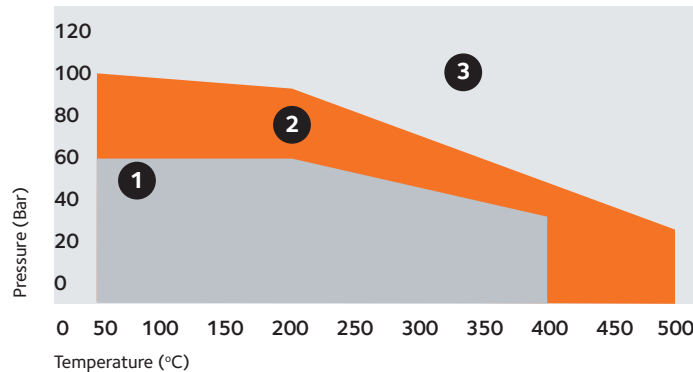

- 1 Suitable subject to chemical compatibility.
- 2 Suitable in some cases but check your application requirements with Flexitallic.
- 3 Contact the Technical Team for applications with higher temperatures and pressures. Applicable to 1.5mm and below.

The operating temperature of non-asbestos sheet material is related to the thickness of materials selected. Thinner materials give better temperature and pressure properties.

As the company's products are used for a multiplicity of purposes and as the company has no control over the method of their applications or use, the company excludes all conditions or warranties, expressed or implied by statute or otherwise, as to their products and/or their fitness for any particular purpose. Any technical co-operation between the company and the customer is given for customers assistance only, and without liability on the part of the company.