



WILLIAM JOHNSTON
& COMPANY LIMITED

Tel: 0141 620 1666 Fax: 0141 620 1888
sales@williamjohnston.co.uk
www.williamjohnston.co.uk



KLINGERsil C-4324

An economic grade based on a mixture of aramid and glass fibres with a nitrile rubber binder. Suitable for general industrial service including oils, hydrocarbons, low pressure steam and water.

The Klinger group has been recognised as the market leader in gaskets and sealing for over a century. Our research and development laboratories have investigated over 250 different fibre forms in the search for asbestos free alternatives. The search has resulted in a range of high quality and high performance asbestos free materials that have been proven in service

General Properties

- Economical
- Good resistance to oils, fuels, hydrocarbons, steam etc
- Excellent resistance to gas leakage
- Meets non-asbestos standard BS7531 Grade Y
- Anti-stick finish on both sides

Tests and Certifications

- BS 7531 Grade Y
- DIN-DVGW
- SVGW 95-043-7
- KTW C 027/95/st
- WRc Approved
- Germanischer Lloyd 98951-97 HH

Availability

- Sheetting (m): 2.0 x 1.5*, 4.0 x 1.5, 1.5 x 1.0
- Thickness (mm): 0.4, 0.5, 0.75, 1.0, 1.5, 2.0, 3.0

* - Denotes standard sheet size




aerospace
sector
certification
scheme

BS EN 9100:2003, ISO 9001:2008
Certificate no: FM 10571



KLINGERSil C-4324

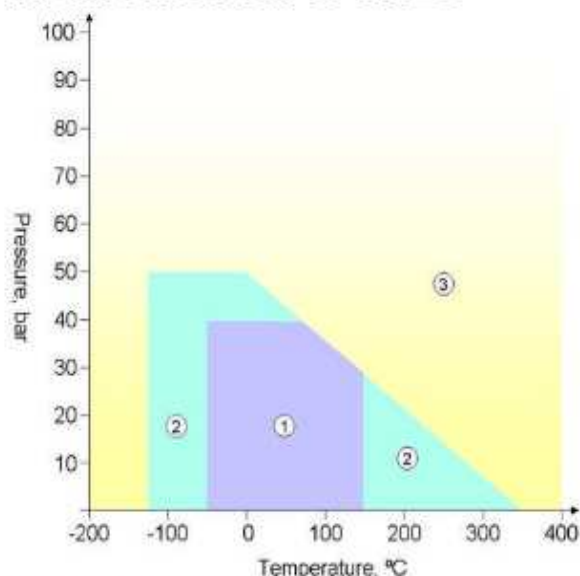

Application Guidelines

1. Usually satisfactory without reference.
2. Usually satisfactory, but suggest you refer to Klinger for advice
3. Caution: May be suitable but essential that you refer to Klinger for advice.

Chemical compatibility must be considered in all cases.

Typical Specifications

Compressibility ASTM F 36 A		10%
Recovery ASTM F 36 A		55%
Stress relaxation DIN 52913	50MPa, 16h/300°C	20MPa
Stress relaxation BS 7531		23MPa
Klinger cold/hot compression (50MPa)	Thickness decrease 23°C decrease at 300°C	11% 26%
Gas leakage according to DIN 3535/6		<0.1ml/min
Chlorides (soluble)		150ppm
Thickness increase after fluid	Oil nr.3:5h/150°C	0-10%
Immersion ASTM F 146	Fuel B:5h/23°C	0-10%

Head Office

KLINGER Ltd
Wharfedale Road
Euroway Trading Estate
Bradford BD4 6SG

Tel: 01274 688 222
Fax: 01274 688 549

Klinger Ltd. Grangemouth

Tel: 01324 472 231
Fax: 01324 482 111

Klinger Ltd. Runcorn

Tel: 01928 577 030
Fax: 01928 575 223

Klinger Ltd. Aberdeen

Tel: 01224 772 962
Fax: 01224 772 953

Klinger Ltd. Middlesbrough

Tel: 01642 220 289
Fax: 01642 220 290

Klinger Ltd. Southampton

Tel: 023 8061 1855
Fax: 023 8061 0360

All information and recommendations contained in this specification sheet are to the best of our knowledge correct. Since conditions of use are beyond our control, users must satisfy themselves that the products are suitable for the intended processes and uses. No warranty is given or implied in respect of information or recommendations or that any use of products will not infringe rights belonging to other parties. In any event or occurrence our liability is limited to our invoice value of the goods delivered by us to you. We reserve the right to change product design and properties without notice