

## Product information

REV2013344

# Stuffing-Box-Packing Type 2010

## Material composition

Style 2010 is diagonally braided from pure, expanded, flexible graphite yarn.

Please note: the colour of the actual product might vary from the above image on this data-sheet.

## Properties

Very flexible and supple packing, good alternative to pre-formed graphite-rings. Style 2010 combines the advantages of pure graphite rings with the ease of installation of conventional packings; very low coefficient of friction and excellent thermal conductivity; does not age or harden; chemically inert (pH 0-14) except with highly oxidizing media.

## Application areas

Rotary pumps and valves in power stations and boiler houses, in the petrochemical industry and many other industrial areas. Because Teadit style 2010 is suitable for a wide range of applications, it can reduce stock inventories considerably.

## Application media

Steam, water, fuel, gases, chemicals, mineral and synthetic oils, effluents. Suitable for all processes, except with highly oxidizing media.


## Not suitable for

Highly oxidizing agents

## Benefits

Style 2010 provides an economic alternative to asbestos packings, it reduces maintenance time and caters for very demanding duties.

Because of its low density style 2010 yields more metres per kg, which makes it a very economical all-round packing!

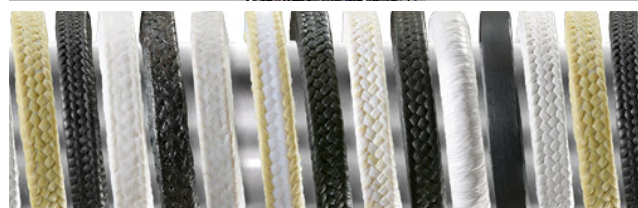

### Temperature:

| - temp<br>(°C) | + temp | steam: | inert gas: |
|----------------|--------|--------|------------|
| 240            | 450    | 650    | 1000       |

### Pressure:

|       | rotating: | reciprocating: | static: |
|-------|-----------|----------------|---------|
| (bar) | 30        | 100            | 300     |

pH: 0 - 14      density: 1,0      v: (m/s) 20



STOCKED, SUPPORTED AND DISTRIBUTED BY


**WILLIAM JOHNSTON  
& COMPANY LIMITED**

TEL: +44 (0) 141 620 1666

email: sales@williamjohnston.co.uk

www.williamjohnston.co.uk

TEADIT INT. - Rosenheimer Str. 10, 6330 Kufstein, AUSTRIA, Tel.: +43-5372-64020-0, Fax: +43-5372-64020-20, austria@teadit.eu, www.teadit.eu  
TEADIT Deutschland - Schanzenstr. 35, 51063 Köln, GERMANY, Tel.: +49-221-922 342-0, Fax: +49-221-922 342-22, germany@teadit.eu

Since all properties, specifications and application parameters shown throughout this catalogue are approximate and may be mutually influenced, your specific application should not be undertaken without independent study and evaluation for suitability. All technical data and advice given is based on experiences TEADIT® has made so far. Failure to select proper sealing products can result in damage and/or personal injury. Properties, specifications and application parameters are subject to change without notice. TEADIT® does not undertake any liability of any kind whatsoever. Please note: the colour of the actual product might vary from the above image on this data-sheet.