



Product information

REV2013345

TEADIT 24 BB

Material properties:

TEADIT 24 BB is a non-asbestos gasket material made from pure, expanded, virgin PTFE. The whole production process is subject to strict quality control, registered under DIN EN ISO 9001.

Application areas:

Because of the excellent thermal and chemical resistance of **TEADIT 24 BB**, it can be used in a wide variety of static applications in nearly all kinds of the industry. The exceptional malleability of expanded PTFE can compensate for out-of-parallel and/or damaged sealing surfaces and allows use with stress sensitive connections and applications where only a limited flange load is available, e.g. plastic flanges, glass flanges, etc. Gaskets can be cut and/or punched from **TEADIT 24 BB**, which can be installed in areas where there is not enough room to install a gasket tape like TEADIT 24B.


Typical applications are the sealing of flanges, housings of pumps, gearboxes and compressors, hand- and manholes, air ducts, compensators, heat exchangers, chemical reactors, and many more.

Technical data:

- Temperature range: - 240°C up to +260°C, for short periods up to +310°C
- Chemical resistance: resistant against all chemicals from pH 0-14 - except molten alkali metals and elemental fluorine at high temperature and pressure
- Pressure resistance: vacuum up to 200 bar
- Density: 0,75 g/cm³, +/- 0,1g/cm³
- Aging resistance: **TEADIT 24 BB** does not age (please note: adhesive tape has limited shelf life!) and is UV-resistant
- Colour: white
- Others: **TEADIT 24 BB** is physiologically harmless. It has no smell or taste. It is neither contaminating nor toxic and does not get influenced by micro-organisms and/or fungi.

Approvals:

- WRc
- FDA
- EU 1935/2004

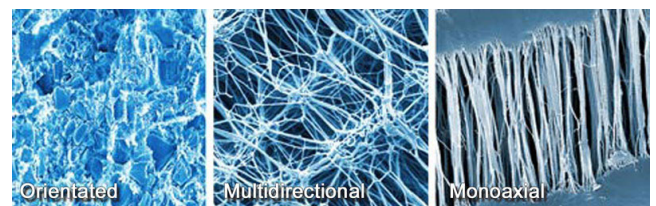

Advantages:

- Quick and simple installation: adhesive strip makes installation easier
- Excellent malleability: compensates for small damages and uneven areas on the flange faces
- Exceptional thermal and chemical stability: makes this material very versatile
- No risk: the versatility of **Teadit 24 BB** eliminates the risk of using wrong material for a certain application – this prevents avoidable breakdowns
- Gaskets can be cut from **TEADIT 24 BB**: this makes installations possible where gaskets in tape-form (e.g. TEADIT 24 B) cannot be used, because flanges cannot be separated far enough

	STOCKED, SUPPORTED AND DISTRIBUTED BY		WILLIAM JOHNSTON & COMPANY LIMITED
	email: sales@williamjohnston.co.uk		Glasgow: 0141 620 1666 Inverness: 01463 238673
	www.williamjohnston.co.uk		

TEADIT INT. - Rosenheimer Str. 10, 6330 Kufstein, AUSTRIA, Tel.: +43-5372-64020-0, Fax: +43-5372-64020-20, austria@teadit.eu, www.teadit.eu
 TEADIT Deutschland - Schanzenstr. 35, 51063 Köln, GERMANY, Tel.: +49-221-922 342-0, Fax: +49-221-922 342-22, germany@teadit.eu

Since all properties, specifications and application parameters shown throughout this catalogue are approximate and may be mutually influenced, your specific application should not be undertaken without independent study and evaluation for suitability. All technical data and advice given is based on experiences TEADIT® has made so far. Failure to select proper sealing products can result in damage and/or personal injury. Properties, specifications and application parameters are subject to change without notice. TEADIT® does not undertake any liability of any kind whatsoever. Please note: the colour of the actual product might vary from the above image on this data-sheet.



TEADIT®

sealing for a safer and greener tomorrow



width mm	thickness 0,5 mm	thickness 1,0 mm	thickness 1,5 mm	thickness 2,0 mm	thickness 3,0 mm				
25	x	x	x	x	x				
50	x	x		x	x				
100	x	x		x	x				
200	x	x	x	x	x				



STOCKED, SUPPORTED AND DISTRIBUTED BY

email: sales@williamjohnston.co.uk

www.williamjohnston.co.uk



**WILLIAM JOHNSTON
& COMPANY LIMITED**

Glasgow: 0141 620 1666

Inverness: 01463 238673

TEADIT INT. - Rosenheimer Str. 10, 6330 Kufstein, AUSTRIA, Tel.: +43-5372-64020-0, Fax: +43-5372-64020-20, austria@teadit.eu, www.teadit.eu
TEADIT Deutschland - Schanzenstr. 35, 51063 Köln, GERMANY, Tel.: +49-221-922 342-0, Fax: +49-221-922 342-22, germany@teadit.eu

Since all properties, specifications and application parameters shown throughout this catalogue are approximate and may be mutually influenced, your specific application should not be undertaken without independent study and evaluation for suitability. All technical data and advice given is based on experiences TEADIT® has made so far. Failure to select proper sealing products can result in damage and/or personal injury. Properties, specifications and application parameters are subject to change without notice. TEADIT® does not undertake any liability of any kind whatsoever. Please note: the colour of the actual product might vary from the above image on this data-sheet.