



Product information

REV2013344

TEADIT 24 B

Material properties:

TEADIT 24 B is a non-asbestos gasket material made from pure, expanded, virgin PTFE. The whole production process is subject to strict quality control, registered under DIN EN ISO 9001.

Please note: the colour of the actual product might vary from the image on this data-sheet.

Application areas:

Because of the excellent thermal and chemical resistance of TEADIT 24 B, it can be used in a wide variety of static applications in nearly all kinds of the industry. The exceptional malleability of expanded PTFE can compensate for out-of-parallel and/or damaged sealing surfaces and allows use with stress sensitive connections and applications where only a limited flange load is available, e.g. plastic flanges, glass flanges, etc.


Typical applications are the sealing of flanges, pump housings, compressors, hand- and manholes, air ducts, compensators, heat exchangers and many more.

Technical data:

- Temperature range: - 240°C up to +260°C, for short periods up to +310°C
- Chemical resistance: resistant against all chemicals from pH 0-14 - except molten alkali metals and elemental fluorine at high temperature and pressure
- Pressure resistance: vacuum up to 200 bar
- Density: 0,65 g/cm³, +/- 0,1g/cm³ (for rectangular cross-sections only)
- Aging resistance: **TEADIT 24 B** does not age (please note: adhesive tape has limited shelf life!) and is UV-resistant
- Colour: white
- Others: **TEADIT 24 B** is physiologically harmless. It has no smell or taste. It is neither contaminating nor toxic. It complies with the FDA 21 CFR 177.1550 Perfluorcarbon Regulations.

Approvals:

- BAM
- DVGW
- WRC
- BOC
- FDA (incl. adhesive backing)
- EU 1935/2004
- TA-Luft

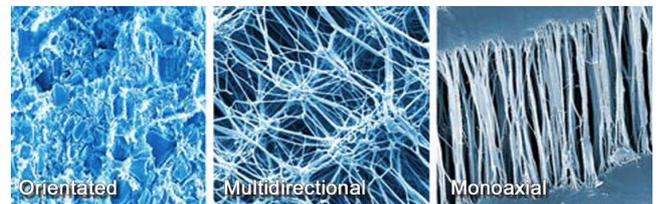

Advantages:

- Quick and simple installation: adhesive strip makes installation easier
- Reduced down time: immediately available, no cutting or punching of gasket necessary
- Reduced stock: a few spools of different sizes cover most applications within a plant
- No risk: the versatility of **Teadit 24 B** eliminates the risk of using wrong material for a certain application – this prevents avoidable breakdowns
- No waste: **Teadit 24 B** is a gasket from a spool, no material gets wasted



STOCKED, SUPPORTED AND DISTRIBUTED BY

 email: sales@williamjohnston.co.uk
www.williamjohnston.co.uk

**WILLIAM JOHNSTON
& COMPANY LIMITED**

Glasgow: 0141 620 1666

Inverness: 01463 238673

Disclaimer

Please note, failure to select the correct materials or products we supply ("the Products") may result in damage to plant, equipment or property. In some instances, it may cause death or personal injury. We are not designers and do not give advice about design related matters concerning the Products. We can help and assist with the technical specifications for the Products. In specific applications, particularly where critical conditions exist, we will try to assist you within the limitations of the services that we offer. All information supplied by us is intended as technical co-operation outlining the specifications of the different Products which we supply. To the extent permitted in law, no warranty is given in respect of any information supplied by us. The customer must satisfy themselves as to the suitability of the Products for their intended application and use. The correct fitting of Products is the responsibility of the customer. Your statutory rights remain unaffected. Save in respect of death, personal injury or fraud, our entire liability to you, however arising from the supply of Products shall be limited to the £10M indemnity amount provided by our insurers.

**TEADIT®**

sealing for a safer and greener tomorrow



width mm	round 1,0 mm	thickness 1,5 mm	thickness 2,0 mm	thickness 2,5 mm	thickness 3,0 mm	thickness 4,0 mm	thickness 5,0 mm	thickness 6,0 mm	thickness 7,0 mm
1	x								
3		x							
5			x						
7				x					
10					x				
12						x			
14							x		
17								x	
20									x
22									
25							x		
28									
40							x		

**TEADIT®**

STOCKED, SUPPORTED AND DISTRIBUTED BY

email: sales@williamjohnston.co.ukwww.williamjohnston.co.uk**WILLIAM JOHNSTON
& COMPANY LIMITED**

Glasgow: 0141 620 1666

Inverness: 01463 238673

TEADIT INT. - Rosenheimer Str. 10, 6330 Kufstein, AUSTRIA, Tel.: +43-5372-64020-0, Fax: +43-5372-64020-20, austria@teadit.eu, www.teadit.eu
 TEADIT Deutschland - Schanzenstr. 35, 51063 Köln, GERMANY, Tel.: +49-221-922 342-0, Fax: +49-221-922 342-22, germany@teadit.eu

Since all properties, specifications and application parameters shown throughout this catalogue are approximate and may be mutually influenced, your specific application should not be undertaken without independent study and evaluation for suitability. All technical data and advice given is based on experiences TEADIT® has made so far. Failure to select proper sealing products can result in damage and/or personal injury. Properties, specifications and application parameters are subject to change without notice. TEADIT® does not undertake any liability of any kind whatsoever. Please note: the colour of the actual product might vary from the above image on this data-sheet.