

Product information

REV2013344

Stuffing-Box-Packing Type 2010/I

Material composition

Style 2010/I is a diagonal braid of pure, expanded flexible graphite ribbons, reinforced with fine metal wires.

Please note: the colour of the actual product might vary from the above image on this data-sheet.

Properties

Combines the benefits of a coil-form packing with the sealing efficiency of pre-formed pure graphite rings; high pressure- and extrusion resistance; excellent thermal conductivity; suitable for a wide temperature range from -200 °C up to +650 °C in steam and non-oxidizing gases, and up to +450 °C in oxidizing media; pressures up to 400 bar can be sealed under ideal mechanical conditions at lower temperatures.

Application areas

Steam and other valves in power stations, refineries, the petrochemical industry, steel mills and many other industries.

Application media


Steam, water, fuel, gases, condensate, oils, effluents, process water and chemical solutions in all processes, except with highly oxidizing media.

Not suitable for

Highly oxidizing media.

Benefits

Suitable for a very wide range of applications, TEADIT 2010/I can reduce stock inventories considerably. Excellent alternative to high temperature / high pressure asbestos valve packings. Easy to install, because very flexible and conformable.

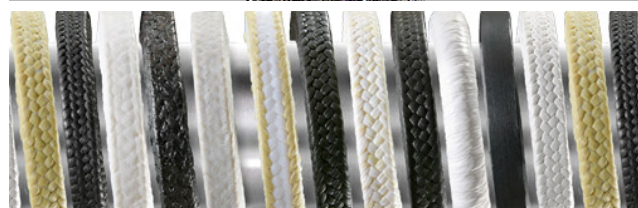

Temperature:

	- temp	+ temp	steam:	inert gas:
(°C)	240	450	650	1000

Pressure:

	rotating:	reciprocating:	static:
(bar)			400

pH: 0-14	density: 1,1	v: (m/s)
----------	--------------	----------



STOCKED, SUPPORTED AND DISTRIBUTED BY


**WILLIAM JOHNSTON
& COMPANY LIMITED**

TEL: +44 (0) 141 620 1666

email: sales@williamjohnston.co.uk

www.williamjohnston.co.uk